



technical data type **Echo LED**

Housing: White powder coated steel.



Optic:

- Frosted cover of LED modules.
- Double Parabolic: Mat reflectors with "V" shaped crossblades.

Optional: Single parabolic louver (Ecoline)

Electrical specifications:

- LED current driver

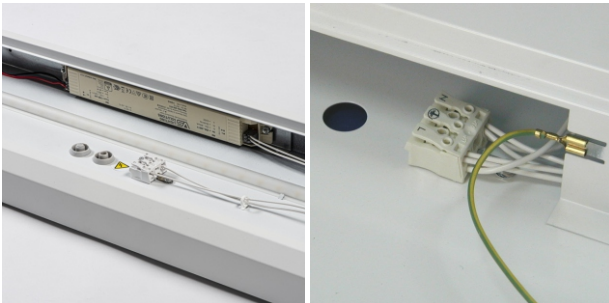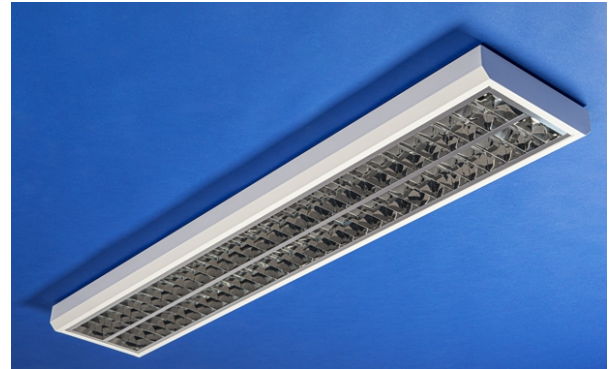


Quick connector

LED:

- Mid Power LED CRI 80 (option CRI 90)
- 3000 K, 4000 K
- UGR <19 (office lighting)
- Lifetime 80.000 h L80 B50
- DALI or DIM 1 - 10 V

Housing	L	W	H	Lf	Kg
418	611	410	52	400	2.2
136	1210	153	52	900	2.2
236	1210	238	52	900	2.5
158	1510	153	52	1200	3.2
258	1510	238	52	1200	4.0
236Eco	1258	264	60	950	2.5
258Eco	1558	264	60	1250	3.2

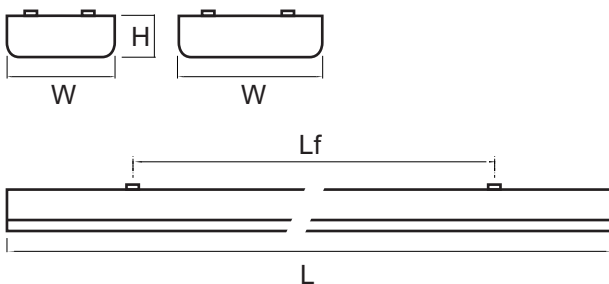

Housing

418	27 W	3200 lm
	37 W	4350 lm
136	19 W	2250 lm
236	26 W	3300 lm
	37 W	4450 lm
158	30 W	3500 lm
258	41 W	5350 lm
	58 W	7200 lm
236Eco	37 W	4000 lm
258Eco	57 W	6200 lm



V16.05.2019



*The dimensions shown on this document can be modified without notice.

technical data type **Echo LED**

