



## technical data type **FUTURIX LED** **Ecoline**

**Base:** Grey polycarbonate with stainless steel suspension brackets.

- **Optional :** Glass reinforced polyester, compression moulded (GRP).


**Diffuser:** is made of a special frosted polycarbonate for a smooth uniform lighting.

- **Optional :** - Stainless steel suspension bracket.  
(for GRP)  
- 2 Glands M20 for IP66.  
- IP66 Wieland connector.  
- IP66 Stucchi connector.

**Impact strength data of the diffuser:**  
diffuser in PC > 6 Nm (IK08)

**Clips:** 1-part polycarbonate clips.

- **Optional :** 1-part stainless steel clips.

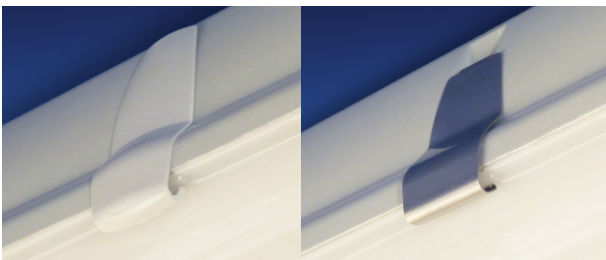

Polycarbonate clip

Stainless steel clip (optional)



IP65 connector (optional)

Stainless steel suspension bracket



High quality linear Led strip.



### **Specifications:**

- Product life min. 50.000h L70 B10 at 25°C.

- Available in 4000K with CRI of min. 80.

- **Optional :** 3000K and 6500K.

- MacAdam : 3 SDCM

- Luminous efficiency: LER diff.: up to \*\* 117 lm/W.

- 220-240V 0/50/60 Hz.

- Ta: -15°C/+35°C.

- **Optional :** - 1-10V and Dali

- Trough-wiring.



(This will influence slightly the Ta.max.)

Housing	Power*	Flux**	Ta.max.
136 (frosted)	32 W	3610 lm	35 °C
236 (frosted)	32 W	3610 lm	35 °C
158 (frosted)	39 W	4575 lm	35 °C
258 (frosted)	39 W	4575 lm	35 °C


\* Total power consumption of Led's and driver.

\*\* Luminous flux of fitting @ 25°C for 840.

Luminous output and electrical load have an initial tolerance of +/-10% from nominal.



# technical data type **FUTURIX LED** **Ecoline**

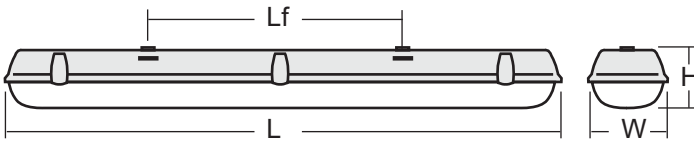

Housing	L	W*	H	Lf	Clips	Kg
136	1275	84	98.5	800	8	1,8
236	1275	134	98.5	800	8	2,9
158	1575	84	98.5	1100	10	2,2
258	1575	134	98.5	1100	10	3,8

\*Dimensions without clips

