

## technical data type IDL

### Body:

White painted metal.  
 Recessed: for opening 600 or 625 mm.  
 3 versions: 1, 2 or 3 LEDlines.  
 60 or 90° optical lenses.

### Optic:

Symetric linear PMMA lenses.  
 Z60 - narrow beam 60°  
 Z90 - wide beam 90°

### Application:

Recessed installation into modular ceiling (square).  
 mod 600: 596 x 596 x 30 mm.  
 mod 625: 622 x 622 x 30 mm.


**Options:** White painted frames for recessed gypsum plasterboard or surface installation.




### Electrical specifications:

- Product life min 80.000 h L80 B50
- Available in 3000K, 4000K and 5700K.
- CRI of min. 80; UGR < 19
- Macadam: < 3 SDCM
- Main part is PMMA plastic optical system, which takes care of perfect lighting distribution, low UGR and high effectivity. (up to 163 lm/W from luminaire).


### Optional: DALI or Dimmable 1-10V

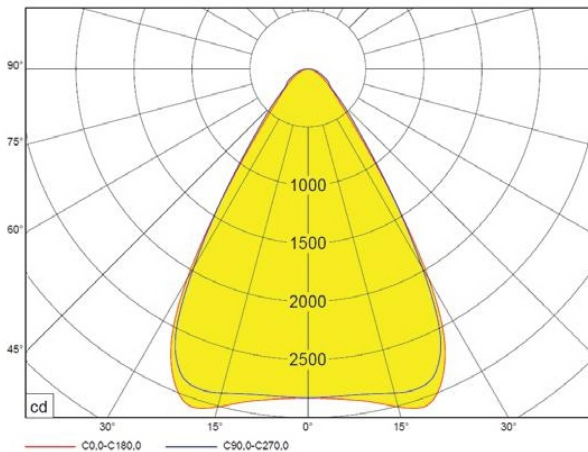

	Power(W)	Flux(lm)	lm/W	Kg
1500/1	9	1300	144	1,7
2000/1	14	2000	143	1,7
3000/1	19	2700	142	1,9
3000/2	18	2700	150	1,9
4000/2	26	3800	146	1,9
3000/3	18	2900	161	2,0
4000/3	25	4000	160	2,0
6000/3	38	5800	153	2,0



28.05.2019

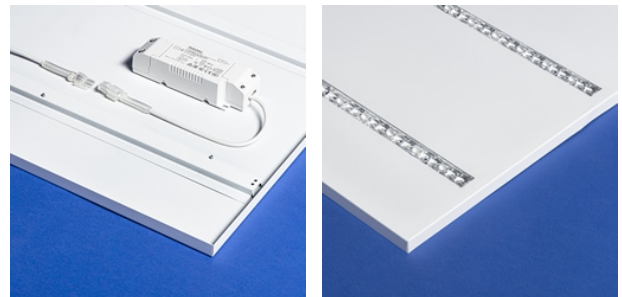

**VLUX**  
 Industrieweg Roosveld  
 3400 LANDEN BELGIUM

Tel + 32 11 88 09 00  
 Fax + 32 11 83 22 22

website [www.vlux.com](http://www.vlux.com)  
**ISO 9001 certified company**

