



technical data type **PAS Fridge**

Special wiring and gear for
industrial cold storage (up to -30°C).



Base : Glass reinforced polyester,
compression moulded (GRP)

- **Optional** : - Stainless steel suspension bracket.
- Double cable entry (same side).
- Wieland, Adels or Stucchi connector.
- Triangles for suspension.

Diffuser : is made of special frosted polycarbonate
(PC) for smooth uniform lighting.

- **Optional** : Clear diffuser (see PAC).

Impact strength data of the diffuser:
diffuser in PC > 6 Nm (IK08)

Clips : 2-part stainless steel clips with retainers.
2 cable glands M20 (PA) included.

Specifications :

- Product life min. 50.000h L80 B10 at Ta.max
or 70.000h L70 B10 at Ta.max.
- Available in 3000K, 4000K and 5000K,
also 6500K on demand.
- CRI of min.80
- MacAdam 3 SDCM.
- Luminous efficiency : up to ** 163 lm/W.
- 220-240V 0/50/60Hz (also DC for CBS).
- Ta: -30°C / Ta.max.
- Special driver for industry applications
(Higher and lower temperature).

- **Optional**:

- DALI.
- High frequency motion detector.
- Trough-wiring in polyester housing
- CRI min.90. (930, 940) correction factor 0,94.
(on demand)





Optional: Clear diffuser

Retainer for
stainless steel clips



High quality
PHILIPS chipboard LED

Stainless steel susp.
bracket (optional) IP67



31.07.2023



technical data type PAS FRIDGE

Housing	Art.	Power(1)	LED	Flux(2)	EEC-LED(3)
1201	S	25 W	1R	4040 lm	C
	H	35 W	1R	5490 lm	C
1501	T	31 W	1R	5050 lm	C
	I	44 W	1R	6860 lm	C
1202	S²	25 W	1R	4040 lm	C
	H²	35 W	1R	5490 lm	C
1502	T²	31 W	1R	5050 lm	C
	I²	44 W	1R	6860 lm	C
	X	53 W	1R	7940 lm	C
	Y	60 W	1R	8730 lm	C
	L	76 W	3R	10290 lm	D
	K	78 W	1R	11170 lm	D
	N	82 W	3R	12000 lm	D
	Z	92 W	1R	13700 lm	D
	Z	104 W	3R	14000 lm	D

(1) Total power consumption of LED's and driver. (+/- 10%)

(2) Luminous flux of fitting @ 25°C for 840, 850 and 865 (correction factor 0.95 for 830)

(3) This product contains a light source of energy efficiency class <C> or <D>. The energy efficiency class <C> is not valid for color 930.

Luminous output and electrical load have an initial tolerance of +/- 10 % from nominal.

VLUX


Industrieweg Roosveld
3400 LANDEN BELGIUM

Tel + 32 11 88 09 00

website www.vlux.com


ISO 9001 certified company

technical data type PAS FRIDGE

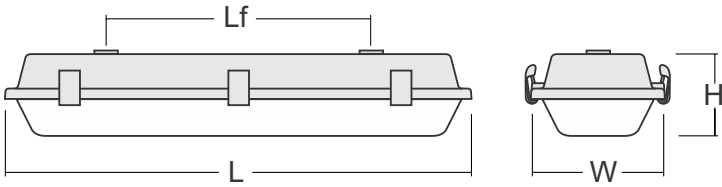

Housing	L	W*	H	Lf	Clips	Kg
158	1612	102	105	1100	10	3.6
236	1312	172	105	800	8	3.8
258	1612	172	105	1100	10	4.8

*Dimensions without clips

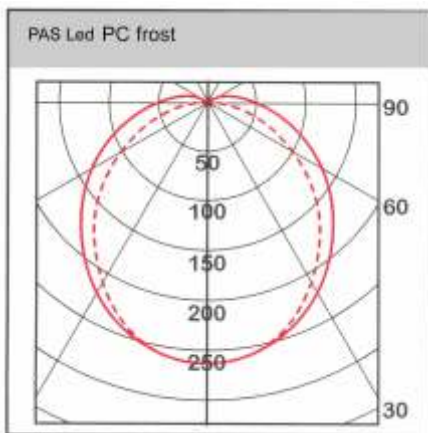

Secured with screws

Double cable-entry
(optional)