



technical data type **TUBE EM**


Base: Impact proof PC housing. IK10

- Free fix mounting bracket.
- Connection: Wieland, Adels, Stucchi connector.
- Silicone gasket.

Diffuser: Special frosted polycarbonate for a smooth uniform lighting.

- *Optional* : - Frosted PMMA diffuser

Gear tray: Aluminium

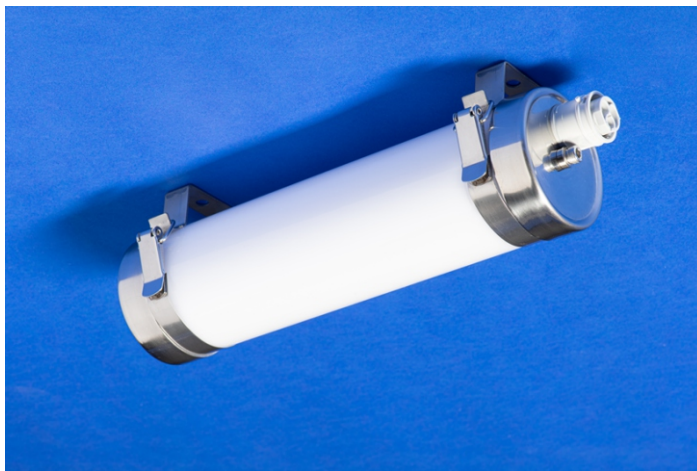


Specifications:

- Non-maintained.
- Multi-watt version : 8W / 825 lm - 13W / 1350 lm
- Available in 3000K, 4000K, 5000K
- Ta: +5° till 30°C.

Housing	L	W	H	Lf(mm)	Kg
301	310	80	102	280 - 290	1,0
601	600	80	102	300 - 500	1,7

Impact strength data: Tube in PC (IK10)



27/09/2022

VLUX
Industrieweg Roosveld
3400 LANDEN BELGIUM

Tel + 32 11 88 09 00

website www.vlux.com
ISO 9001 certified company

